



i3PROJECTOR L3502Wi Plus

INTERACTIVE FINGER TOUCH LASER PROJECTOR

i3PROJECTOR L3502Wi Plus is an ultra short-throw projector without lamp! The next generation projector offers numerous performance capabilities and lowers the total cost of ownership dramatically. i3PROJECTOR Wi Plus is user-friendly and has advanced features for flexible presenting.

Connecting the L3502Wi Plus to a computer, users can operate computer software with the 10 touch, finger touch interactivity in the same way as a mouse, and can also digitally annotate the projection, without the need for an additional interactive whiteboard.

The 10 touch operation enables collaborative learning and helps boost meeting creativity. As it is mounted to the wall above the projection surface, i3PROJECTOR completely eliminates shadows.

Offering a brightness of 3500 lm and a light source lifetime of 20,000 hours, this projector is the ideal projection solution for classrooms and meeting rooms.

INTERACTIVE

- Interactive Technology: curtain wave
- 10 touch: the projector is capable to recognize 10 simultaneous touch points (depending on operations system)
- Interactive Area: 80" to 110" diagonal

INSPIRING

- Laser technology
- Lamp life 20,000hrs
- Ultra short-throw projector
- Instant On / Off (5sec)
- Green design: Mercury free
- Wide color range

INTEGRATED



- 3500 Lumen
- WXGA 1280x800
- Aspect ratio 16:10
- Speaker 10W
- DLP Technology

WARRANTY

- 3 years on the projector
- 3 years (max. 10,000 hours) on the light source *


*extendable to 5 years



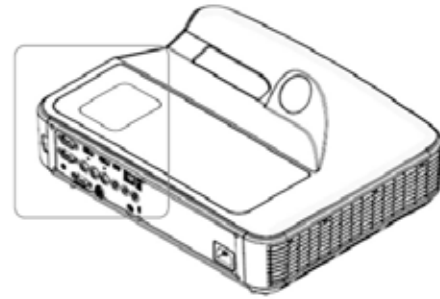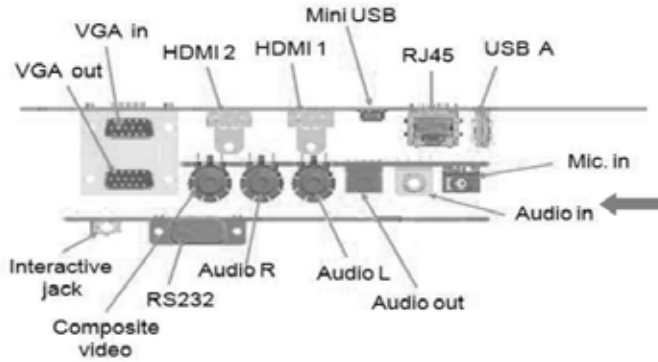

SPECIFICATIONS

Laser light source LASER with 20,000hrs lifetime		VGA audio input	Qty : 1 / 3.5mm phone jack (blue) / stereo (dedicated to selected VGA input port)
Brightness	3500 lumens	Composite audio input Qty	2 / RCA-Left (white) / RCA-Right (red) / stereo
Contrast	1,800:1 (native) / 10,000:1 (APM)	Microphone input Qty	1 / 3.5mm phone jack (pink) / mono
Resolution (native)	1280 x 800	System audio output Qty	1 / 3.5mm phone jack (green) / stereo
Aspect ratio (native)	16 : 10	RS232	Qty : 1 / DB-9 female / 9600bps Purpose : projector control
Throw ratio	0.27	Mini USB	Qty : 1 / device mode Purpose : for firmware upgrade (USB1.0) / interactive (USB2.0)
Focus range	85" - 110"	RJ45	Qty : 1 / Fast Ethernet (100Base-T) Purpose : remotely projector control (Crestron / AMX / PJ-Link) Others : video streaming
Temperature/ Humidity	Operating : 5°C ~ 40°C / 5%~90% without condensation Storage : 0°C ~60°C / 5%~95% without condensation Shipping :- 20°C ~ 60°C / 5%~95% without condensation	USB A	Qty : 1 / host mode / USB2.0 (for local playback or Wi-Fi dongle)
Temperature / Altitude	Operation 5°C~40°C @ 0~2,500 feet 5°C~35°C @ 5°C~30°C @ 5,000~10,000 feet	Speaker	1 x 10W
Thermal Protection	Auto shutdown : Ambient temperature exceeds 47±2°C Auto ECO : Ambient temperature exceeds 40°C	Power consumption	291W (Full mode), 198W (Eco mode)
Noise level	Full mode : 36dBA (typical) / 38dBA (maximum) ECO mode : 32dBA (typical) / 35dBA (maximum)	Standby power	(1) Idle without LAN wakeup : < 0.5W (2) Idle with LAN wakeup : < 8W
HDMI input	Qty : 2 (HDMI1 with MHL2.0 support) HDMI : 1.3a HDCP : 1.3 Video Standard: 480i/480p/576i/576p/720p/1080i/1080p PC Graphics: up to UXGA (1600x1200@60Hz)	Dimensions	Width x Depth x Height = 383mm x 308mm x 86mm
VGA input	Qty : 2 (1 sharing with VGA output by OSD setup) Video Standard: 480i/480p/576i/576p/720p/1080i/1080p PC Graphics: up to UXGA (1600x1200@60Hz)	Weight Net	5.5kg (12.1lb)
Composite input	Qty : 1 / RCA (yellow) Video Standard : 480i/576i	EMC	CE, FCC, CCC
VGA output	Qty : 1 (Sharing with one of VGA input by OSD setup) Loop through VGA input	Safety	TUV, UL, CCC
		Green	RoHS, WEEE, REACH
		Accessories	AC power cord 3m x1 VGA cable 1.8m x1 USB cable 1.8m x1 Wall mount x1 Curtain wave x1 Passive pen x2 Remote control x1 User Manual

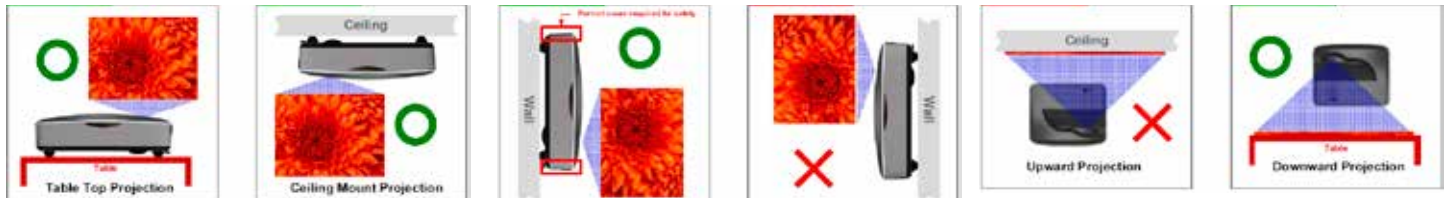

AUTHORISED DISTRIBUTOR